STRYKER HD

5-50×56 SFP

Perfect for F-Class Competition



Thank you for considering this precision optical equipment.

Delta Optical spółka z ograniczoną odpowiedzialnością sp.k.
Nowe Osiny, ul. Piękna 1, 05-300 Mińsk Mazowiecki, Poland
TEL +48 25 786 0520 | FAX +48 25 759 2995
BetterForever@deltaoptical.eu | DeltaOptical.eu




STRYKER HD

5-50×56 SFP

with DLS-1: SKU DO-2504 with DLS-2: SKU DO-2508 with DLS-3: SKU DO-2507



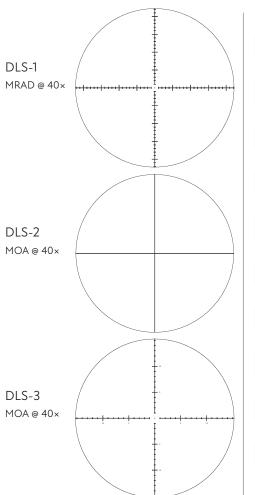

| Magnification Range | 5x - 50x |
|--------------------------|-----------------|
| Objective Diameter | 56mm |
| Field of View @100m 4.5x | 7.1m |
| Field of View @100m 30x | 0.7m |
| Eye Relief | 89 – 100mm |
| Diopter Range | -2D/+3D |
| Water Proof (N2) | 0.3kg/cm² |
| Reticle Position | 2nd focal plane |
| Illumination | Dot |
| Per Click DLS-1 | 0.05mrad |
| Elev Adj Range DLS-1 | 30mrad |
| Wind Adj Range DLS-1 | 15mrad |
| Per Click DLS-2/3 | 1/8MOA |
| Elev Adj Range DLS-2/3 | 100MOA |
| Wind Adj Range DLS-2/3 | 50MOA |
| Parallax Adjustment | 10m − ∞ |
| Zero-Stop | YES |
| Tube Diameter | 34mm |
| Length | 398mm |
| Weight | 1065g |
| Warranty | 10 years |

Included in the box:
Throw Lever, Sunshader.





Optional extra: FT Parallax Wheel.





STRYKER HD 5-50×56 SFP

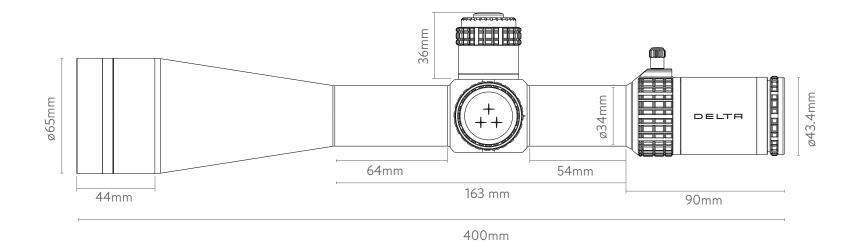


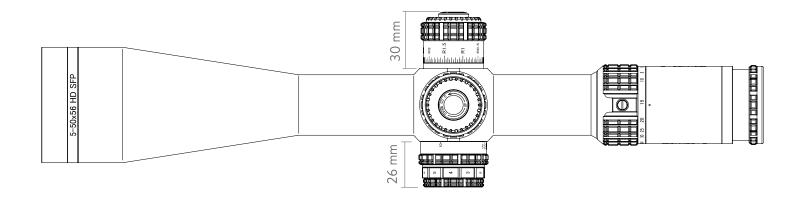



DLS-1 MRAD @ 40×

Precise target point covers 0.03mrad at 100m. 0.005mrad crosshairs in the horizontal and vertical have markings in increments of 0.2mrad and 1mrad for quick easy adjustments for drop and windage correction. Excellent at lower magnifications (7 - 10x) when target point is 0.17 - 0.12mrad. Day-night

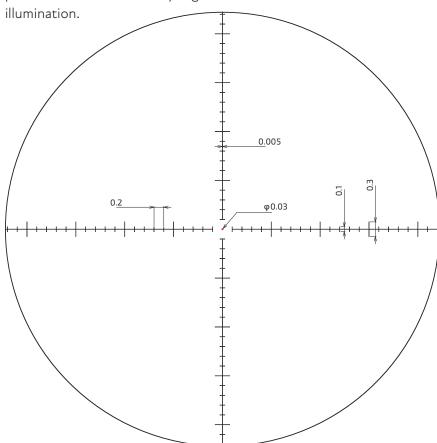


DLS-2 MOA @ 40×

Precision in purest form.

Two thin 0.02MOA crosshairs intersect in the centre. Uncluttered.

Nothing distracts the eye. Central illuminated point in centre of crosshair.

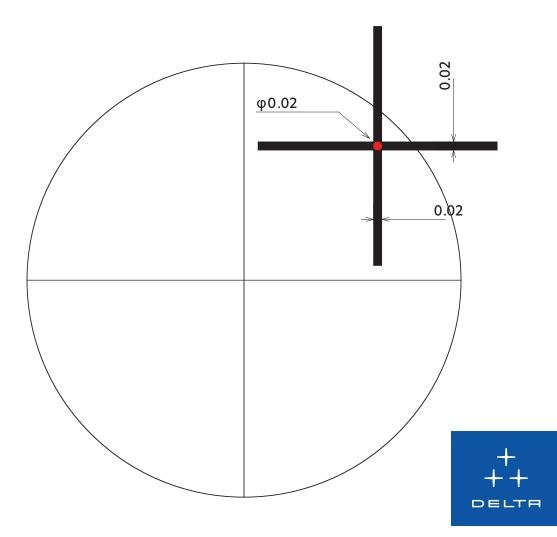

DLS-3 MOA @ 40×

Equivalent to DLS-1 reticle, but scaled in MOA. Aiming point covers 0.1MOA (2.91 mm) at a distance of 100m.

